

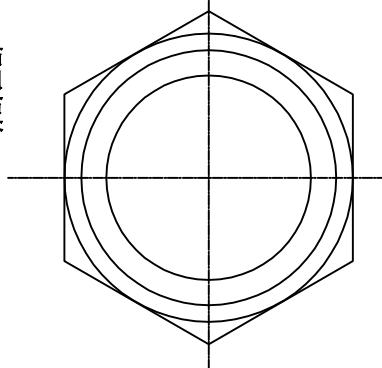
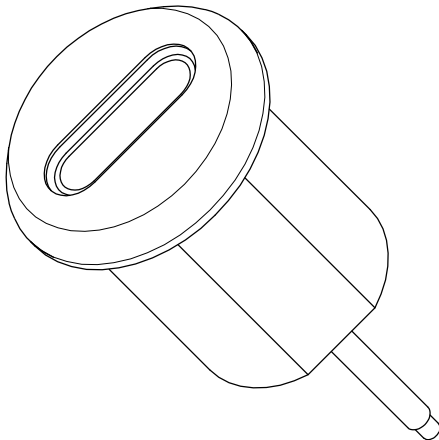
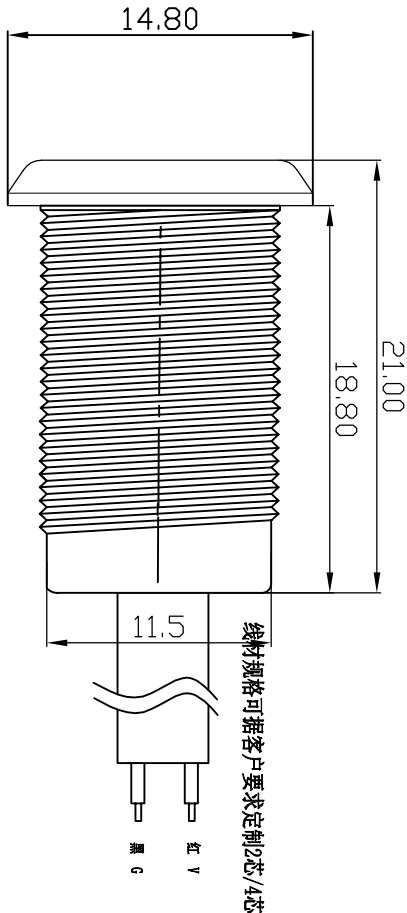



RoHS 客户图

REV.	ECN	DESCRIPTION	MOD'D	DATE
A0	—	新订图面	Lee	2020.03.18

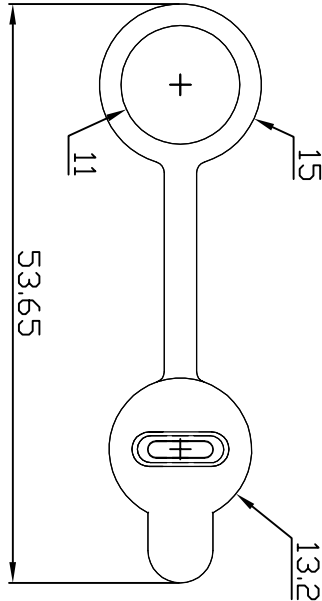


螺牙规格: M12*1.0*14*3.0

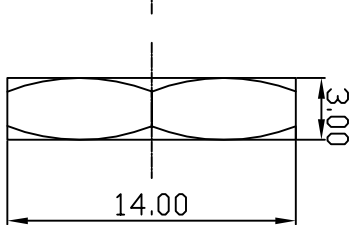

SPECIFICATION

1. Rating: 30V 5A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V)
4. Withstand voltage: 500VAC;
5. Insertion and extraction force: 5-20N
6. Life test: 10000 cycles;

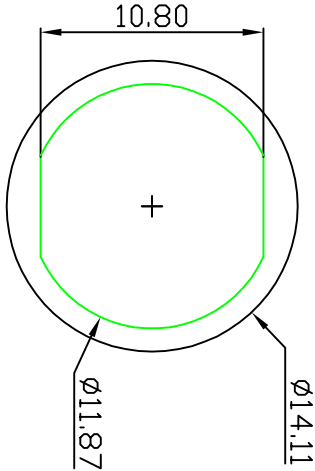

料号: CHT-TS023X-HXXX-PX
“TS”表示TYPEC
“015”立插系列
“R”= (袋装)
“H”表示高度
表示PIN数

创益讯电子（深圳）有限公司 Chuangyixun Electronics (Shenzhen) Co., Ltd		页码 (SHEET):	1/1	比例 (SCALE): 1:1
		单位 (UNIT):	mm	
品名 (ITEM NO):	TPC 2P焊线带外螺牙（带灯）	设计 (DESIGN):	LKH	
		审核 (CHECKED):	TYJ	
图号 (DWG NO):	CHT-TS023R-H210-P2	核准 (APPROVEE):	LZB	
				公差表 TOLERANCE INDICATION .0-1.30 .0° ±10° .00-0.20 .0° ±8° .000-0.10 .0° ±5°

These drawings and specifications are owned by CHUANGYIXUN Electronics (Shenzhen) Co., LTD., and shall not be copied. It may not be reproduced or used in any way without the prior written consent of our company.