

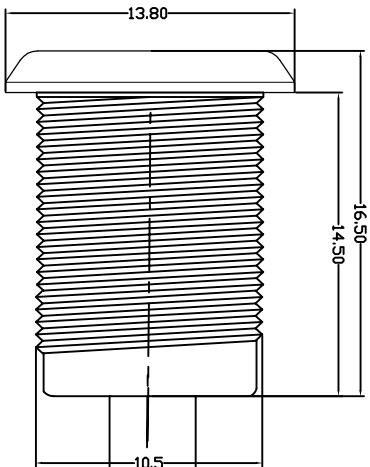






REV.	ECN	DESCRIPTION	MDF'D	DATE
A0	—	新订图面	Lee	2020.03.18

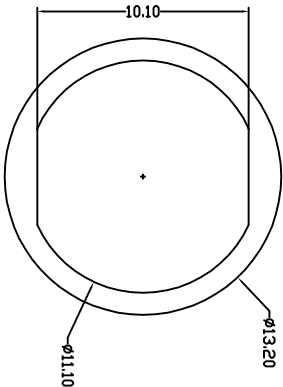

线材规格可据客户要求定制2芯/4芯/5芯



机板开孔尺寸

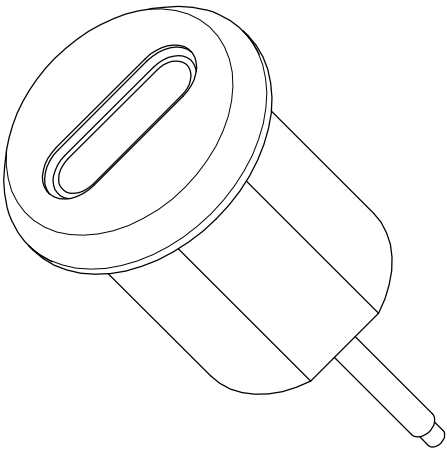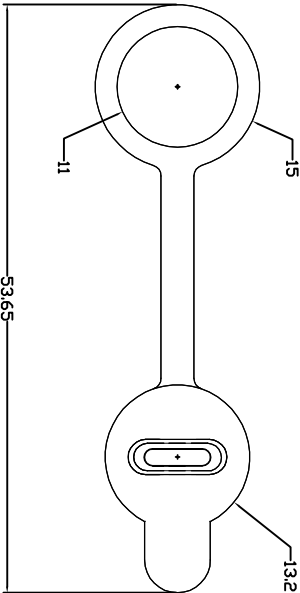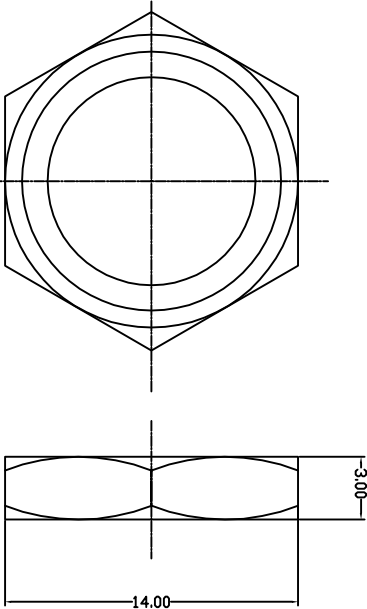


螺牙规格: M1.1*1.0*14*3.0

SPECIFICATION

1. Rating: 30V 3A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V)
4. Withstand voltage: 500VAC;
5. Insertion and extraction force: 5-20N
6. Life test: 10000 cycles;

料号: CHT-TS023X-HXXX-PX

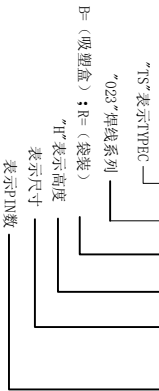

创益讯电子（深圳）有限公司

Chuangyixun Electronics (Shenzhen) Co., Ltd

品名 (ITEM NO)	TYPE C 5P焊线带外螺牙	图号 (DWG NO)	CHT-TS023R-H200-P5	页码 (SHEET)	1/1	比例 (SCALE) 1:1
设计 (DESIGN)	LKH	审核 (CHECKED)	TYJ	单位 (UNIT):	mm	未注公差 TOLERANCE UNPREFIRED
核准 (APPROVED)						0.030 0.1±0.1 0.020 0.1±0.1 0.000 ±0.10 0.00 ±0.05

These drawings and specifications are owned by CHUANGYIXUN Electronics (Shenzhen) Co., LTD., and shall not be copied. It may not be reproduced or used in any way without the prior written consent of our company.