





REV.	ECN	DESCRIPTION	MDF'D	DATE
A0	———	新订图面	Lee	2020.03.18




NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES

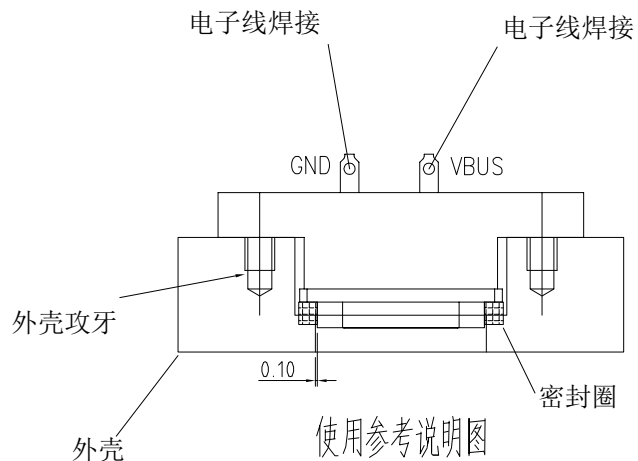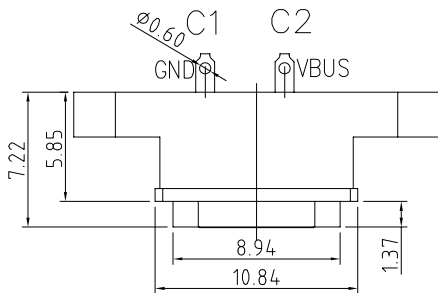

无需PCB板,可直接焊线

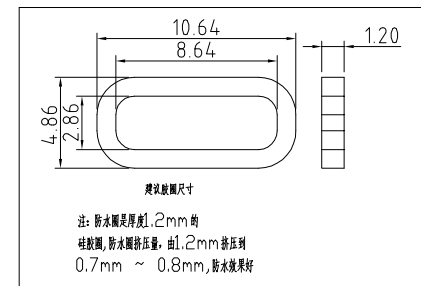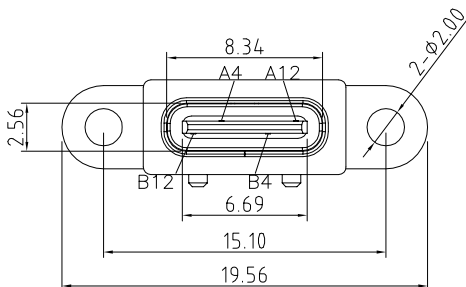


PIN ASSIGNMENT

PIN NO.	A12&B12	A4&B4
SIGNAL NAME	GND	VBUS
PCB PAD NO.	C1	C2

INTERFACE(FRONT VIEW)

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
			VBUS								GND
GND								VBUS			
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

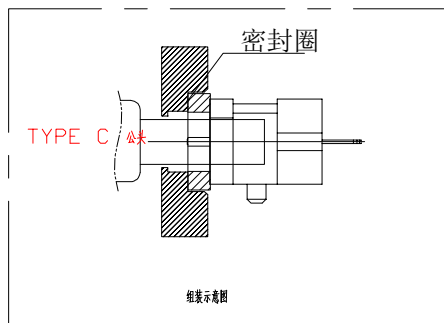

5	Shell2	1	SUS304 Ni Plating T=0.20mm	Ni:40~120u";
4	Shell1	1	SUS304 Ni Plating T=0.3mm	Ni:40~120u";
3	Housing2	1	LCP(G.F30%)	
2	Contact	4	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni:40~160u"; Au:CONTACT AREA:3u", OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PARTNAME	Q'TY	FINISH	NOTE

料号: CHT-TS023X-HXXX-PX

"TS"表示TYPEC -

"015"立插系列

B= (袋装) ; R= (卷装)

"H"表示高度

表示尺寸

表示PIN数

创益讯电子（深圳）有限公司

Chuangyixun Electronics (Shenzhen) Co., Ltd

品名 (ITEM NO)	2PIN 外接焊线式防水 TYPE C
--------------	---------------------

图号 (DWG NO)	CHT-2-722
-------------	-----------

页码 (SHEET)

1/1

比例(SCALE) 1:1

单位(UNIT):

设计 (DESIGN)

LKH

审核 (CHECKED)

TYI

核准 (APPROVED)

These drawings and specifications are owned by CHUANGYIXUN Electronics (Shenzhen) Co., LTD., and shall not be copied. It may not be reproduced or used in any way without the prior written consent of our company .